

AKD-172




Deposited metal hardness:HRC 44-48

Application : Applicable to the surface of various worn parts, such as gears, buckets, mining machinery, etc.

Typical Chemical Composition(%):

	C	Si	Mn	S	P	Cr	Other	—
Requirement	0.2-0.4	1.0	1.5	0.007	0.02	3.0	≥1.0	—

AKD-212

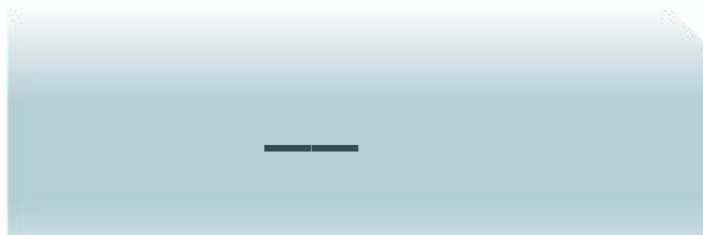

Deposited metal hardness:HRC 54-57

Application : Applicable to the surface of various worn parts, such as gears,buckets, mining machinery, etc.

Typical Chemical Composition(%):

	C	Si	Mn	S	P	Cr	Other	—
Requirement	0.3-0.5	1.5	2.0	0.06	0.02	5.0-8.0	≥1.0	—